

Chapter 1

- I Wave Optics
- II Electromagnetic Optics
- III Polarization
- IV Crystal Optics
- V Polarization devices

I-1 Wave Optics: definitions

- From experimental evidence: light propagates in the form of waves
- Light wave (vibration) = scalar wave = wavefunction
- This description accounts for a large number of optical phenomena
- Nature of light remains unspecified.

I-1 Wave Optics: definitions

- Wave travels in a homogeneous, non-absorbing medium with phase velocity c (wave speed)
- In vacuum, subscript 0 (zero) is used, e.g.,

$$c_0, \mu_0, \epsilon_0$$

- The index of refraction defined as:

$$n = \frac{c_0}{c}$$

I-1 Wave Optics: definitions

- Wavefunction is a **real** function of position - defined by position vector \vec{r} and time t : $u(\vec{r}, t)$
- Wavefunction satisfies the wave equation:

$$\nabla^2 u(r, t) - \frac{1}{c^2} \frac{\partial^2 u(r, t)}{\partial t^2} = 0$$

- Principle of superposition applies:

$$u(\vec{r}, t) = u_1(\vec{r}, t) + u_2(\vec{r}, t)$$

I-1 Wave Optics: definitions

- **OPTICAL INTENSITY** is the optical power per unit surface area (W.cm^{-2}). **It is the measurable quantity**
- It is proportional to the time average of $u^2(\vec{r}, t)$

$$I(\vec{r}, t) = 2 \left\langle u^2(\vec{r}, t) \right\rangle_{\Delta t}$$

- Δt is taken over many light cycles.....

I-1 Wave Optics: definitions

- **OPTICAL POWER P** = power (W) flowing into an area A normal to the direction of propagation:

$$P(t) = \int_A I(\vec{r}, t) dA$$

- **OPTICAL ENERGY**: time integral of optical power over the time interval

$$P = \int_{\Delta t} P(t) dt$$

I-1 Wave Optics: definitions

- **FLUENCE** = Optical energy per unit surface area ($\text{J}\cdot\text{cm}^{-2}$). Commonly specified for laser light at the focus of a converging lens.
- Photodetectors:
 - Photoelectric detectors: photon releases an electron (photocurrent). Photodiode (p-i-n), Schottky diodes (metal-semiconductors), Photomultiplier tubes. **Sensitive to intensity of incident light**
 - Conversion of photon energy into heat: Power meters. Temperature rise is measured with a thermopile. Sensitive to total power absorbed

I-2 Wave Optics: monochromatic waves

- Monochromatic waves have a harmonic (sine, cosine) time dependence:

$$u(\vec{r}, t) = a(\vec{r}) \cos[2\pi\nu t + \varphi(\vec{r})]$$

$a(\vec{r})$: Amplitude V.m^{-1}

$\varphi(\vec{r})$: Phase (in radians) (determined by initial conditions)

ν (nu) : Frequency (Hz)

ω (omega) : Angular frequency (in rads^{-1}) = $2\pi\nu$

I-2 Wave Optics: monochromatic waves

- It is convenient to use a complex wavefunction instead:

$$U(\vec{r}, t) = a(\vec{r})e^{i[2\pi\nu t + \varphi(\vec{r})]}$$

- From above definition:

$$u(\vec{r}, t) = \text{Re}[U(\vec{r}, t)] \text{ (Re = real part)}$$

$$u(\vec{r}, t) = \frac{1}{2}[U(\vec{r}, t) + U^*(\vec{r}, t)]$$

I-2 Wave Optics: monochromatic waves

- Can be rewritten in the form:

$$U(\vec{r}, t) = U(\vec{r})e^{2\pi i \nu t}$$

- The amplitude is now a complex function:

$$U(\vec{r}) = a(\vec{r})e^{i\varphi(\vec{r})}$$

- Helmholtz equation obtained (after substitution into wave equation):

$$(\nabla^2 + k^2)U(\vec{r}) = 0$$

$$k = \frac{2\pi}{\lambda} = \frac{2\pi\nu}{c} = \text{wavenumber (m}^{-1}\text{)}$$

I-2 Wave Optics: monochromatic waves

- Notes:

- The choice $\cos[2\pi\nu t + \varphi(\vec{r})]$ is arbitrary; depends on the initial conditions
- $\sin[\varphi(\vec{r}) - 2\pi\nu t]$ Would be also an acceptable function

- Most optical phenomena are steady-state (no time dependence): it is therefore often customary to drop the time factor or dependency: $e^{2\pi i \nu t}$

I-2 Wave Optics: monochromatic waves

- The optical intensity: $I(\vec{r}) = |U(\vec{r})|^2$
- The intensity does not vary with time
- Surfaces of equal phase are called wavefronts:

$$\varphi(\vec{r}) = \text{constant}$$

Typically : $\varphi(\vec{r}) = 2\pi q$ (q is an integer)

I-3 Wave Optics: Elementary waves

- There are various possible solutions of the Helmholtz equation in a homogeneous medium:
 - PLANE WAVE
 - SPHERICAL WAVE
 - PARAXIAL WAVES (GAUSSIAN BEAM - OPTICAL RESONATOR)

I-3 Wave Optics: Plane wave

- The Plane Wave with complex amplitude:

$$U(\vec{r}) = Ae^{-i\vec{k} \cdot \vec{r}}, \quad \varphi(\vec{r}) = \vec{k} \cdot \vec{r}$$

- A is the complex envelope and k is the wave vector, with $\vec{k} \cdot \vec{r} = k_x x + k_y y + k_z z = \text{constant}$

- Equation describing parallel planes separated by a distance of one wavelength:

$$\lambda = \frac{2\pi}{k}$$

I-3 Wave Optics: Plane wave

- Can choose z axis in the direction of k :


$$U = Ae^{-ikz}$$

$$u(\vec{r}, t) = |A| \cos[2\pi\nu t - kz + \arg\{A\}]$$

$$u(\vec{r}, t) = |A| \cos\left[2\pi\nu\left(t - \frac{z}{c}\right) + \arg\{A\}\right]$$


- c and λ are the phase velocity and wavelength in the medium:

$$c = \frac{c_0}{n} \quad \text{and} \quad \lambda = \frac{\lambda_0}{n}$$

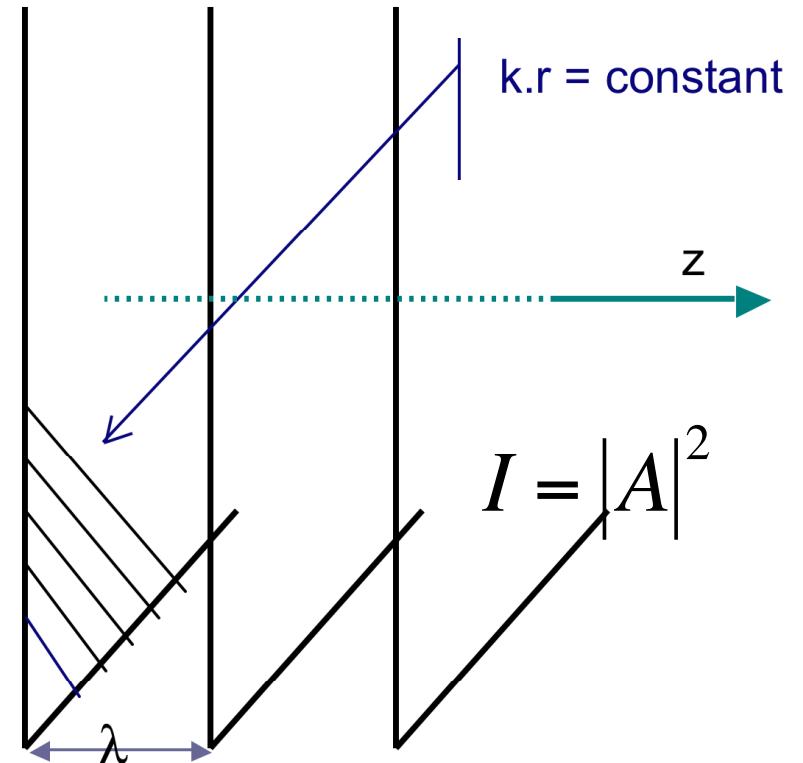

I-3 Wave Optics: Spherical wave

- The complex amplitude is: $U(r) = \frac{A}{r} e^{-ikr}$
- r is the radial distance from origin
- Optical Intensity: $I(r) = \frac{|A|^2}{r^2}$
- If A is real, ie $\arg\{A\} = 0$, the surfaces of equal phase: $kr = 2\pi n$ or $r_x^2 + r_y^2 + r_z^2 = \left(\frac{2\pi n}{k}\right)^2$ define concentric spheres, separated by a distance of $\frac{2\pi}{k}$
- Large $r \longrightarrow$ becomes plane

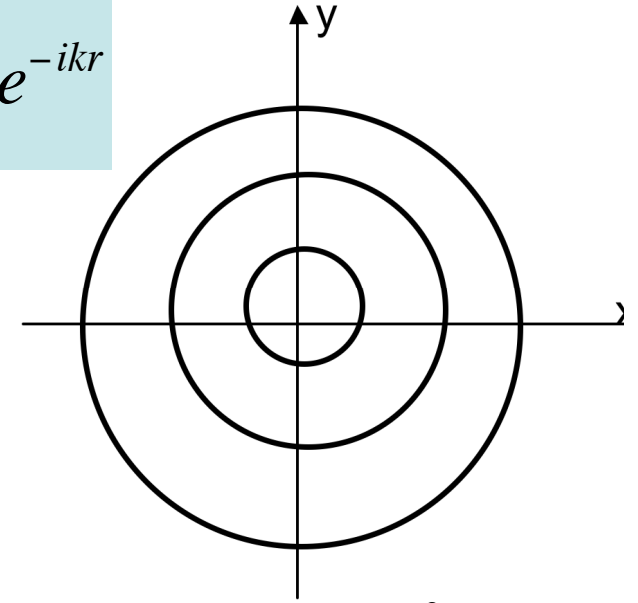


I-3 Wave Optics: Spherical wave


- At points close to the z axis and far from the origin:
 - Paraboloidal wave: approximation for behaviour between spherical and planar.
 - At large z , behaviour is almost planar
- This is typically the behaviour of paraxial waves (eg. the Gaussian beam often found in laser systems)

I-3 Wave Optics: Paraxial waves

- Wavefronts normal are paraxial rays:

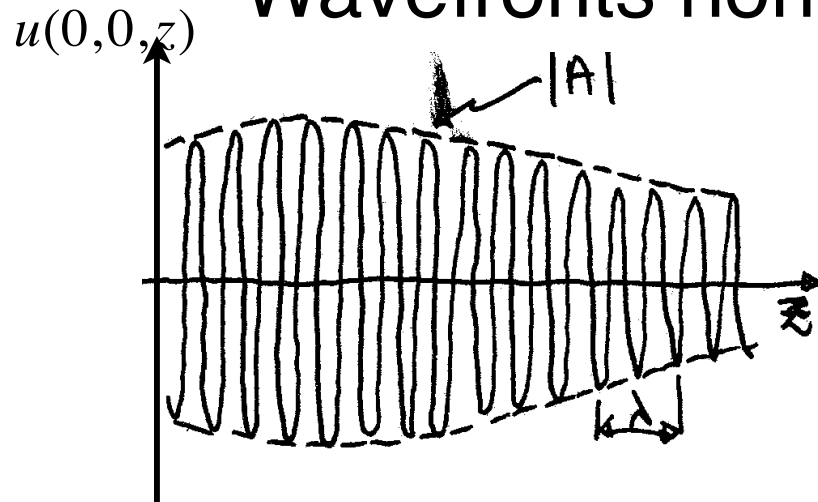

Wavefunction of paraxial wave at points along the z axis

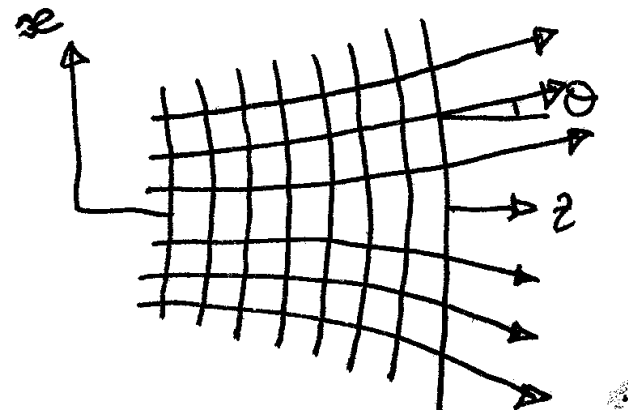

Wavefronts and wavefront normals

$\theta \text{ small}$

$$\sin \theta \approx \tan \theta \approx \theta$$

I-3 Wave Optics: Paraxial waves

- To construct a paraxial wave: start with a plane wave Ae^{-ikz} and modulate the complex envelope A making it a slowly varying function of r :

$$U(\vec{r}) = A(\vec{r})e^{-ikz}$$

$A(\vec{r})$ variation with position is very small over a distance of one λ .

It is still approximately planar.

I-3 Wave Optics: Paraxial waves

- Paraxial waves satisfy the paraxial Helmholtz equation:

$$\nabla_T^2 A - i2k \frac{\partial A}{\partial z} = 0$$

$$\nabla_T^2 = \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \equiv \text{Transverse Laplace operator}$$

- Most useful is the Gaussian beam
(mode of the spherical-mirror resonator)

II -Electromagnetic Optics

- Light is an electromagnetic phenomenon: carries electric $\vec{E}(\vec{r}, t)$ and magnetic fields $\vec{H}(\vec{r}, t)$
- These are vector waves: scalar wave equation fails to explain electric and magnetic effects induced by light
- Problem: how can we describe the electromagnetic state of matter in the presence of light?

II -Electromagnetic Optics: Definitions

- New set of vectors is required to describe the response of matter:

Electric current density \vec{j}

Electric displacement (electric flux density) \vec{D}

Magnetic displacement (magnetic induction) \vec{B}

ρ density of free charges

- **E , H , B , D , j** and ρ are related by Maxwell's equations (set of 4 coupled PDE's)

II -Electromagnetic Optics: Definitions

- General solution of Maxwell's equations is complicated (would provide electromagnetic response of matter - D and B - in the presence of E and H fields)
- For harmonic fields and isotropic media, relation between applied fields and response is simple

II -Electromagnetic Optics: In Vacuo

- ϵ = Electric permittivity or dielectric constant

$$\vec{D} = \epsilon \vec{E}$$

-
- μ = magnetic permeability

- $\mu \sim 1$ non-magnetic (most substances)
- $\mu > 1$ paramagnetic
- $\mu < 1$ diamagnetic

$$\vec{B} = \mu \vec{H}$$

-
- σ = specific conductivity
 - σ negligibly small: insulators (dielectrics)
 - σ not negligibly small: conductors

$$\vec{j} = \sigma \vec{E}$$

II -Electromagnetic Optics: Definitions

- Previous set of equations describes the response of matter in the presence of weak fields.
- Linear response: 1st power of fields
- For strong fields (strength of the order of valence electrons binding energies):
 - Response is non linear
 - Must include higher-order components of the fields

II -Electromagnetic Optics: Definitions

$$\vec{D} = \epsilon \vec{E} + (\epsilon)_2 \vec{E} \vec{E} + (\epsilon)_3 \vec{E} \vec{E} \vec{E} + \dots$$

$$\vec{D} = \epsilon \vec{E} + (\epsilon)_2 \vec{E}^2 + (\epsilon)_3 \vec{E}^3 + \dots$$

- The laws of Optics must be modified
(Non-linear Optics, Bloembergen, 1965)

II -Electromagnetic Optics: In Medium

- Effects of the fields can be described using “additive” relations:

$$\vec{D} = \epsilon_0 \vec{E} + \vec{P}$$

$$\vec{P} = \text{Polarization} = \text{Dipole moment/m}^3$$

$$\vec{B} = \mu_0 \vec{H} + \mu_0 \vec{M}$$

$$\vec{M} = \text{Magnetization} = \text{Magnetic moment/m}^3$$

II -Electromagnetic Optics: Definitions

- For weak fields, polarization and magnetization are assumed to be linearly proportional to the applied fields:

$$\vec{P} = \chi \epsilon_0 \vec{E}$$

χ = electric susceptibility

$$\vec{D} = \epsilon_0 \vec{E} + \chi \epsilon_0 \vec{E} = \epsilon_0 (1 + \chi) \vec{E}$$

$$\epsilon = \epsilon_0 (1 + \chi)$$

$$\epsilon_r = \frac{\epsilon}{\epsilon_0} = (1 + \chi)$$

relative permittivity

$$\mu_0 \vec{M} = \mu_0 \chi_m \vec{H}$$

χ_m = magnetic susceptibility

$$\vec{B} = \mu_0 \vec{H} + \chi_m \mu_0 \vec{H} = \mu_0 (1 + \chi_m) \vec{H}$$

$$\mu = \mu_0 (1 + \chi_m)$$

$$\mu_r = \frac{\mu}{\mu_0} = (1 + \chi_m)$$

relative permeability

II -Electromagnetic Optics: Maxwell's Equations

$$\begin{aligned}\nabla \times \vec{E} &= -\mu \frac{\partial \vec{H}}{\partial t} \\ \nabla \cdot \vec{D} &= \rho\end{aligned}$$

$$\begin{aligned}\nabla \times \vec{H} &= \varepsilon \frac{\partial \vec{E}}{\partial t} + \vec{j} \\ \nabla \cdot \vec{B} &= 0\end{aligned}$$

- In optics, generally non-magnetic media and no currents ($\vec{M} = \vec{0}$ and $\vec{j} = \vec{0}$)
- The flow of electromagnetic energy is given by the Poynting vector: $\vec{P} = \vec{E} \times \vec{H}$

II -Electromagnetic Optics: Maxwell's Equations

- Most optical materials are dielectrics:
 - L = linear : if \mathbf{P} is linearly related to \mathbf{E}
 - ND = non-dispersive: instantaneous response: \mathbf{P} at t is determined by \mathbf{E} at t .
 - H = homogeneous: relation between \mathbf{P} and \mathbf{E} is independent of r
 - I = isotropic: relation between \mathbf{P} and \mathbf{E} is independent of the direction of \mathbf{E} . Medium is identical from all directions of space.

II -Electromagnetic Optics: Maxwell's Equations

- Medium is L, ND, H and I:

$$\vec{P} = \chi \epsilon_0 \vec{E}; \vec{D} = \epsilon \vec{E}; \epsilon = \epsilon_0 (1 + \chi)$$

- Each component of E, H satisfy separately the wave equation (same as wave optics):

$$\nabla^2 u(r, t) - \frac{1}{c^2} \frac{\partial^2 u(r, t)}{\partial t^2} = 0 \text{ with } c = \frac{1}{(\epsilon \mu_0)^{1/2}} = \frac{c_0}{n}$$

$$n = \left(\frac{\epsilon}{\epsilon_0} \right)^{1/2} = (1 + \chi)^{1/2}$$

II -Electromagnetic Optics: Maxwell's Equations - inhomogeneous medium

- Medium is L, ND, I, inhomogeneous
- (e.g. a graded-index optical fibre)
- The spatial variations of $n = n(\vec{r})$ are small over distances of a few wavelengths

$$\vec{P} = \chi(\vec{r})\epsilon_0\vec{E}; \vec{D} = \epsilon(\vec{r})\vec{E}$$
$$\nabla^2\vec{E} - \frac{1}{c(\vec{r})^2} \frac{\partial^2\vec{E}}{\partial t^2} = 0$$

II -Electromagnetic Optics: Maxwell's Equations

- Medium is L, ND, H but anisotropic: relation between \mathbf{P} and \mathbf{E} depends on the direction of \mathbf{E}
- \mathbf{P} and \mathbf{E} are not necessarily parallel:
 - Dielectric properties described by an array of (3x3) constants called the susceptibility tensor

II -Electromagnetic Optics: Maxwell's Equations-Anisotropic medium

- Each component of \mathbf{P} (or \mathbf{D}) is given by:

$$P_i = \sum_j \epsilon_0 \chi_{ij} E_j$$

$i, j = 1, 2, 3$ denotes x, y, z components

$$D_i = \sum_j \epsilon_{ij} E_j$$

ϵ_{ij} components of electric permittivity tensor

- Typically **crystals** with non cubic symmetries are anisotropic media

II -Electromagnetic Optics: Maxwell's Equations nonlinear medium

- The relation between \vec{P} and \vec{E} is non linear: $\vec{P} = \Psi(\vec{E})$, e.g. $\vec{P} = a_1 \vec{E} + a_2 \vec{E}^2 + a_3 \vec{E}^3$
- Maxwell's equations must be used to derive a non-linear partial differential eqn


$$\nabla^2 \vec{E} - \frac{1}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = \mu_0 \frac{\partial^2 \vec{P}}{\partial t^2} = \mu_0 \frac{\partial^2 \Psi(\vec{E})}{\partial t^2}$$

Basic equation of non linear optics

II -Electromagnetic Optics: Elementary EM waves

- The **Transverse Electromagnetic (TEM)** Plane Wave (medium L,H,I):

$$\vec{E}(\vec{r}) = \vec{E}_0 e^{-i\vec{k}\cdot\vec{r}} \quad \vec{H}(\vec{r}) = \vec{H}_0 e^{-i\vec{k}\cdot\vec{r}}$$

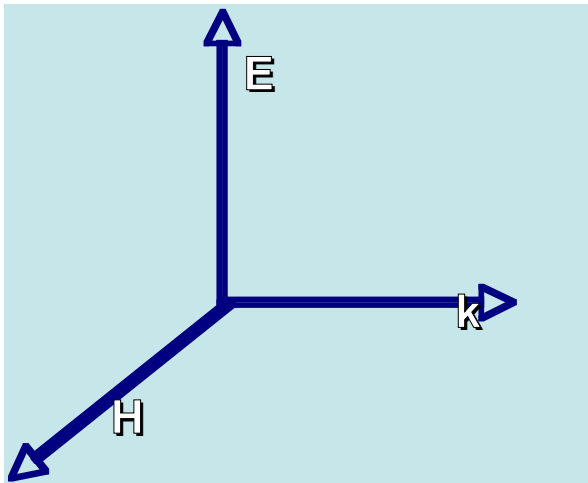

$$(1) \text{ From Maxwell: } \left(\frac{E_0}{H_0} \right) = \left(\frac{\omega \mu_0}{k} \right) = \left(\frac{c_0 \mu_0}{n} \right) = \frac{\left(\frac{\mu_0}{\epsilon_0} \right)^{\frac{1}{2}}}{n} = \eta$$

Eta = (optical) impedance of medium

$$(2) \text{ From Poynting: } I = \frac{|E_o|^2}{\eta}$$

III-Polarisation of Light

- Polarisation = time course of the direction of the electric field vector $E(r,t)$
- In paraxial optics, EM waves are approximately TEM: $E(r,t)$ lies in transverse plane
- If medium is isotropic: wave is elliptically polarized

III-Polarisation of Light

- Polarisation plays an important role in optics:
 - Amount of reflected light depends on polarisation state at the boundary (interface)
 - Amount of light absorbed depends on state of polarisation (dichroism)
 - Refractive index of anisotropic materials depends on polarisation state (see optical devices - birefringent materials)
 - Rotation of plane of polarisation of linearly polarised light in presence of external electric or magnetic field

III-Polarisation of Light: polarisation ellipse

- $\vec{E}(z, t) = \text{Re} \left[\vec{A} e^{-i 2\pi \nu (t - \frac{z}{c})} \right]$

Monochromatic plane wave travelling in Oz direction with velocity c

- Complex envelope (amplitude): $\vec{A} = A_x \hat{x} + A_y \hat{y}$

$$A_x = a_x e^{-i\varphi_x}; \quad A_y = a_y e^{-i\varphi_y}$$

III-Polarisation of Light: polarisation ellipse

- Polarisation = End point of $E(z,t)$ = location of points whose coordinates are (E_x, E_y) : $\vec{E}(z,t) = E_x \hat{x} + E_y \hat{y}$

Defining $\tau = 2\pi\nu(t - \frac{z}{c})$


$$E_x = a_x \cos(\tau + \varphi_x), \quad E_y = a_y \cos(\tau + \varphi_y), \quad E_z = 0$$

$$\frac{E_x}{a_x} = \cos\tau \cos\varphi_x - \sin\tau \sin\varphi_x \text{ etc...and } \varphi = \varphi_y - \varphi_x$$

III-Polarisation of Light: polarisation ellipse

- Equation of ellipse (conic):

$$\left(\frac{E_x}{a_x}\right)^2 + \left(\frac{E_y}{a_y}\right)^2 - 2\left(\frac{E_x}{a_x} \frac{E_y}{a_y}\right) \cos \varphi = \sin^2 \varphi$$

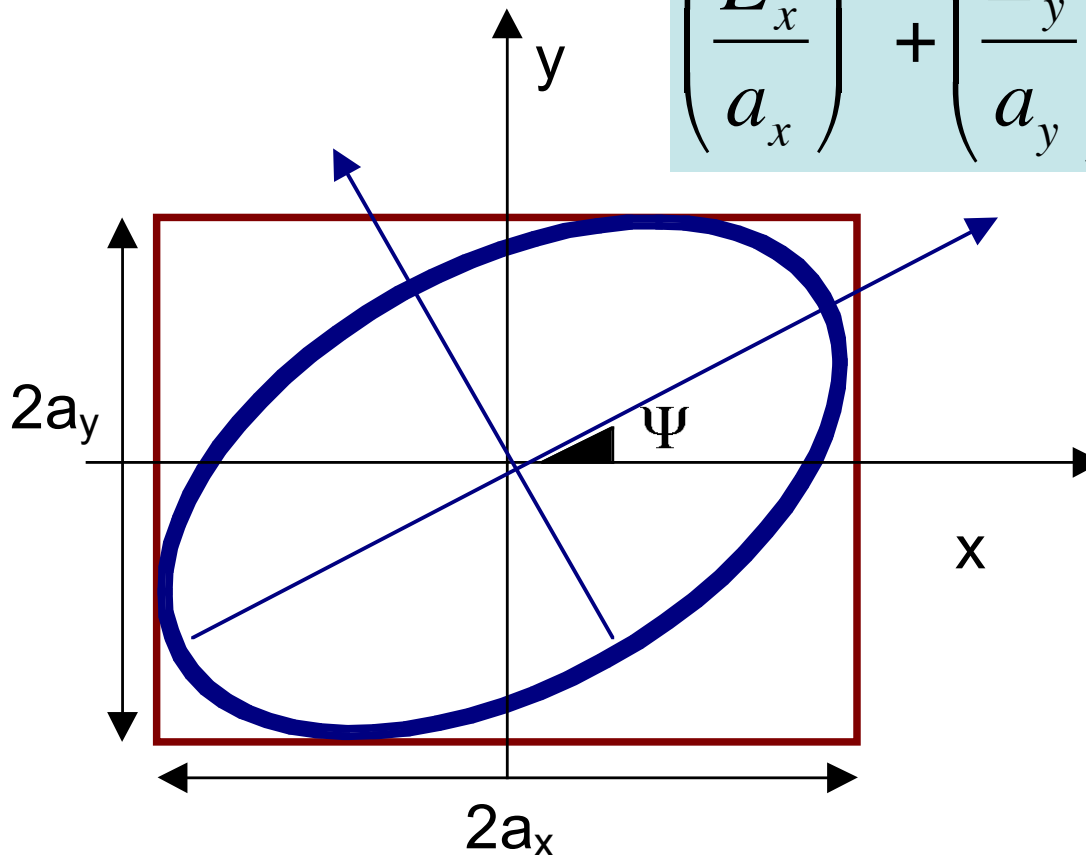


The "tilt" Ψ is obtained from:

$$\tan 2\Psi = \frac{2a_x a_y \cos \varphi}{(a_x^2 - a_y^2)}$$


III-Polarisation of Light: polarisation ellipse

- The magnetic vector is also elliptically polarised
- At fixed value of z , \mathbf{E} rotates at frequency (ν) in $(x-y)$ plane tracing out an ellipse
- At fixed t (snap shot): the location of the tip follows a helical trajectory
- State of polarisation determined by tilt (value of ψ) and ratio of major to minor axes

III-Polarisation of Light: Polarisation ellipse

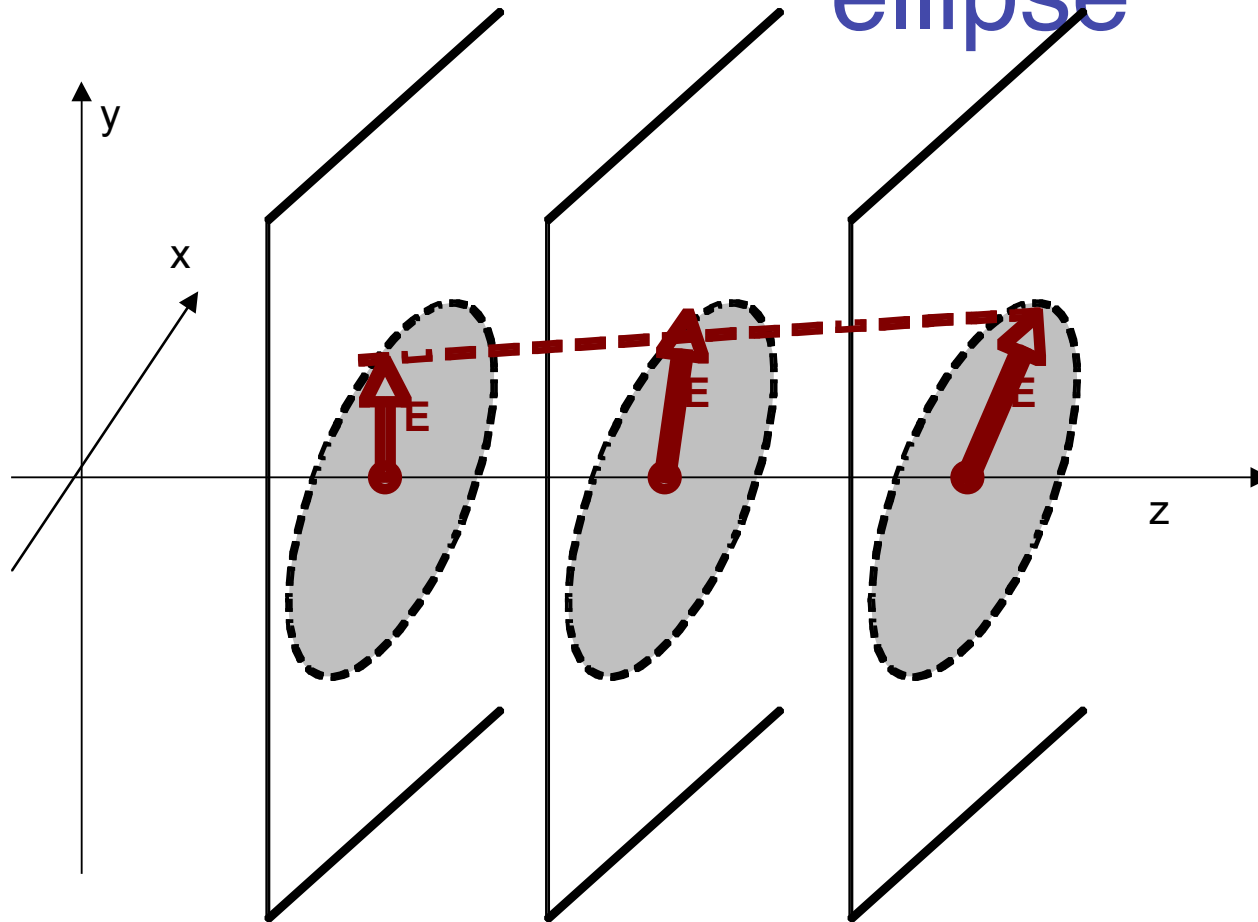


Timecourse of tip of \vec{E} is an elliptical helix:

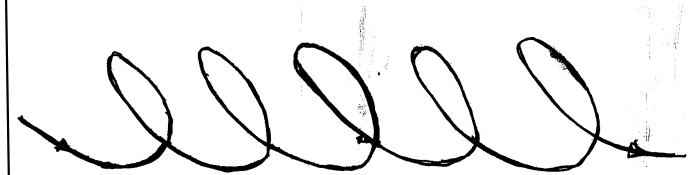

III-Polarisation of Light: polarisation ellipse

Right-Handed Elliptically Polarised: $\sin\varphi > 0$

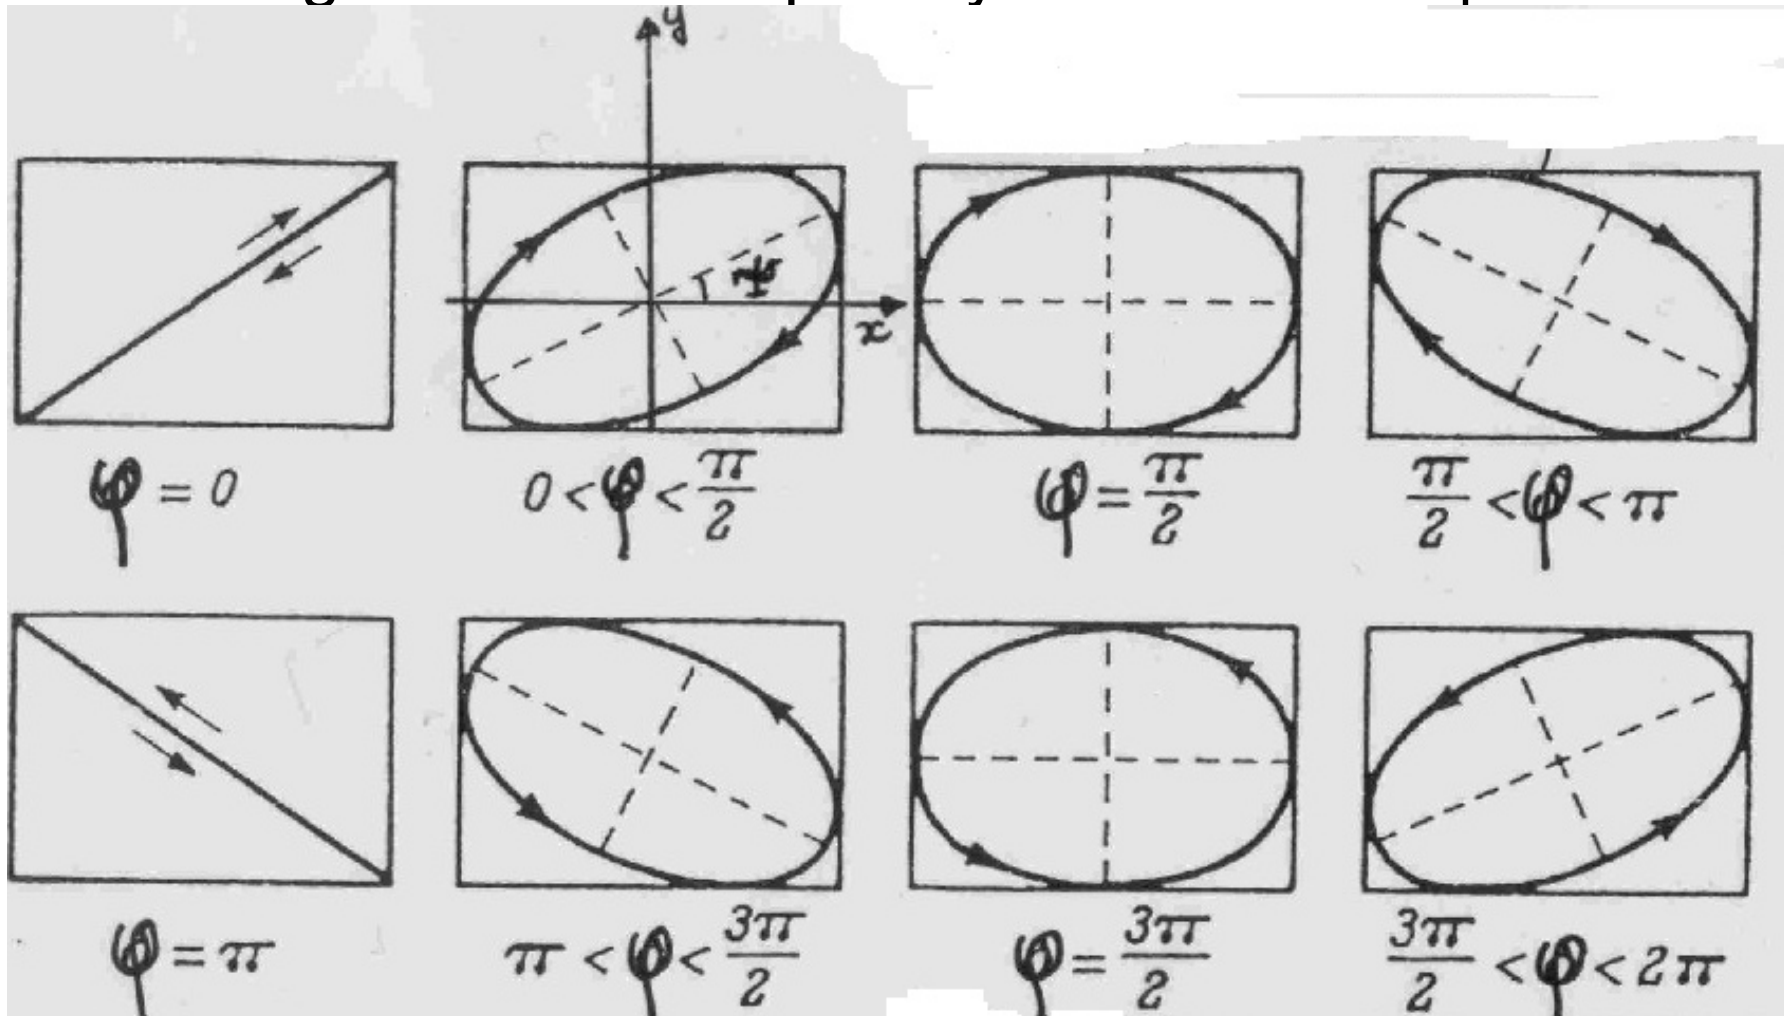

Left-Handed Elliptically Polarised: $\sin\varphi < 0$

III-Polarisation of Light: polarisation ellipse

- The nature of the polarisation can be determined from:

$$\frac{E_y}{E_x} = \frac{a_y}{a_x} e^{i(\varphi_x - \varphi_y)} = \frac{a_y}{a_x} e^{-i\varphi}$$

- Linear Polarisation:

$$\frac{E_y}{E_x} = (-1)^m \frac{a_y}{a_x}, \text{ as ellipse reduces to a straight line}$$

when $\varphi = m\pi$ ($m = 0, \pm 1, \pm 2, \dots$)

Linear polarisation also for a_x or $a_y = 0$

III-Polarisation of Light: polarisation ellipse

- Circular Polarisation: the ellipse degenerates into a circle if $a_x = a_y = a_0$ and $\varphi = m\pi/2$ ($m = \pm 1, \pm 3, \pm 5, \dots$)

$$E_x^2 + E_y^2 = a_0^2$$

- Using complex form:

Right - handed circularly polarized : $a_x = a_y, \varphi = \pi/2$

$$\frac{E_y}{E_x} = e^{-i\frac{\pi}{2}} = -i$$

Left - handed circularly polarized : $a_x = a_y, \varphi = -\pi/2$

$$\frac{E_y}{E_x} = e^{i\frac{\pi}{2}} = i$$

III-Polarisation of Light: Matrix Representation; Jones Vector

- A monochromatic plane wave is completely determined by the knowledge of the complex envelope A_x and A_y
- Can be represented in the form of a 2-component column matrix -the Jones vector:

$$\vec{J} = \begin{bmatrix} A_x \\ A_y \end{bmatrix}$$

III-Polarisation of Light: Jones Vector

- From J, one can calculate the total light intensity:

$$I = \left(|A_x|^2 + |A_y|^2 \right) / 2\eta$$




- The orientation and shape of the polarisation ellipse can be obtained from:

$$\frac{a_y}{a_x} = \frac{|A_y|}{|A_x|}; \varphi = \varphi_y - \varphi_x = \arg\{A_y\} - \arg\{A_x\}$$

III-Polarisation of Light: Jones Vector

- Jones vectors for typical polarisations:
intensity is normalised so that:

$$\left(|A_x|^2 + |A_y|^2\right) = 1 \text{ and } \varphi_x = 0$$

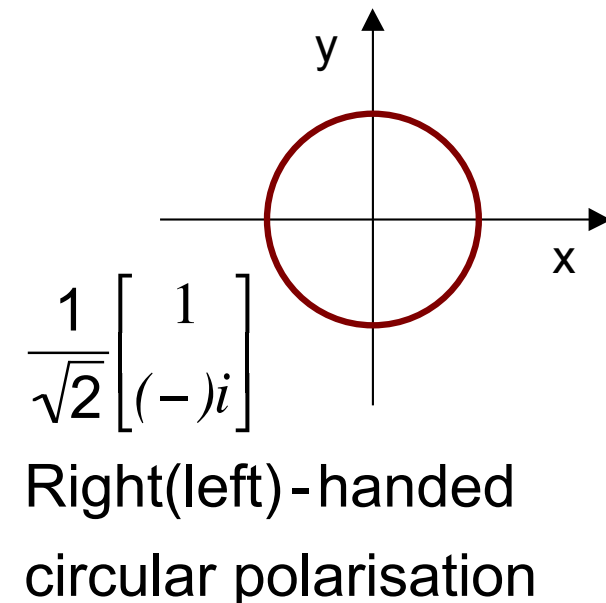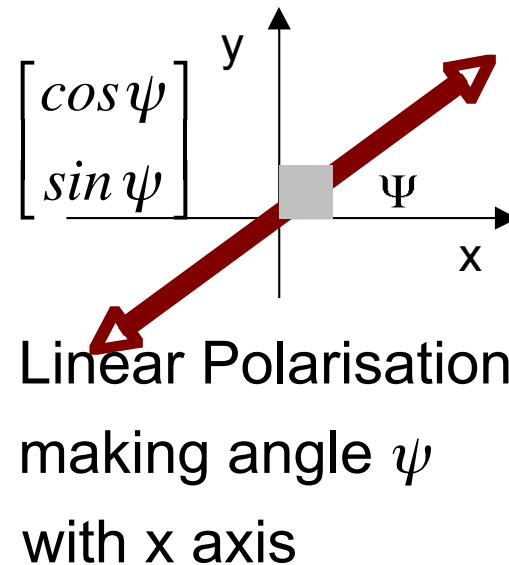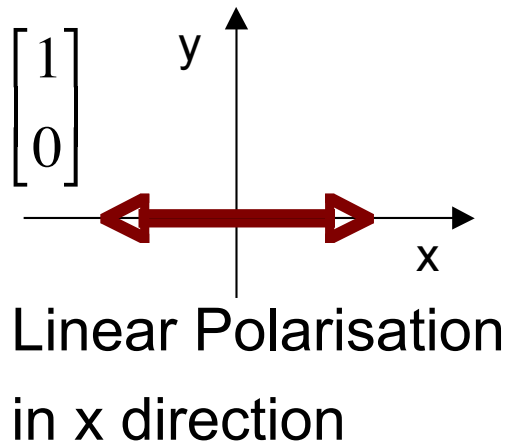

III-Polarisation of Light: Jones Matrix

- Jones vectors \vec{J}_1 and \vec{J}_2 are orthogonal if (inner product is 0):

$$\vec{J}_1 \cdot \vec{J}_2^* = (A_{1x}A_{2x}^* + A_{1y}A_{2y}^*) = 0$$

- Any arbitrary Jones vector \vec{J} , can be analysed as a weighted superposition of two orthogonal polarisations:


$$\begin{aligned}\vec{J} &= \alpha_1 \vec{J}_1 + \alpha_2 \vec{J}_2 \\ \alpha_1 &= \vec{J} \cdot \vec{J}_1^* ; \alpha_2 = \vec{J} \cdot \vec{J}_2^*\end{aligned}$$

\vec{J}_1, \vec{J}_2 normalised to unity

$$\vec{J}_1 \cdot \vec{J}_1^* = \vec{J}_2 \cdot \vec{J}_2^* = 1$$

III-Polarisation of Light: Jones Matrix

- A linear optical system that maintains the plane wave nature of light but alters its polarisation can be represented by a (2×2) Jones matrix T :

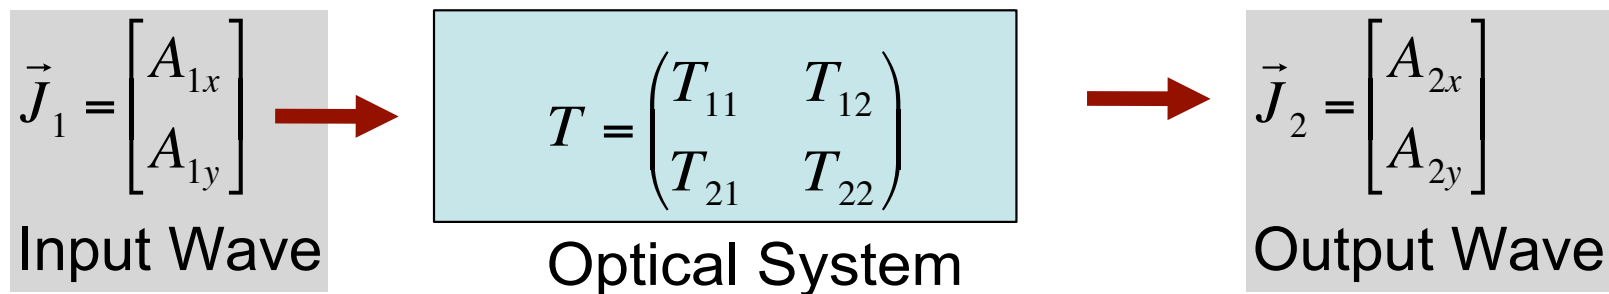

$$\vec{J}_2 = T\vec{J}_1$$


III-Polarisation of Light: Jones Matrix

■ Examples of Jones matrices:

1. The Linear Polariser:

$$T = \begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}$$

$$\begin{pmatrix} A_{1x} \\ A_{1y} \end{pmatrix} \xrightarrow{T} \begin{pmatrix} A_{2x} = A_{1x} \\ 0 \end{pmatrix}$$

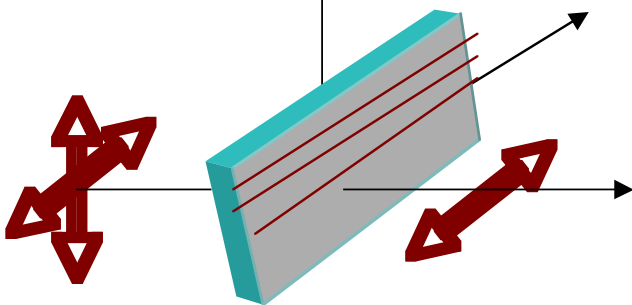

2. The Wave Retarder:

$$T = \begin{pmatrix} 1 & 0 \\ 0 & e^{-i\Delta} \end{pmatrix} \quad \begin{array}{l} \Delta = \frac{\pi}{2} = \text{quarter-wave retarder} \\ \Delta = \pi = \text{half-wave retarder} \end{array}$$

$$\begin{pmatrix} A_{1x} \\ A_{1y} \end{pmatrix} \xrightarrow{T} \begin{pmatrix} A_{2x} = A_{1x} \\ A_{2y} = A_{1y} e^{-i\Delta} \end{pmatrix}$$

3. The Polarisation Rotator:

$$T = \begin{pmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{pmatrix}$$

$$\begin{pmatrix} \cos \theta_1 \\ \sin \theta_1 \end{pmatrix} \xrightarrow{T} \begin{pmatrix} \cos \theta_2 \\ \sin \theta_2 \end{pmatrix}$$

$$\theta_2 = \theta + \theta_1$$

III-Polarisation of Light: Normal modes

- Normal modes of a polarisation system are the states of polarisation that remain unchanged when transmitted through the system
- Normal modes = eigenvectors of T matrix (2 modes)

$$\mathbf{T}\vec{J} = \mu\vec{J}$$

III-Polarisation of Light: Normal modes


- Normal modes are orthogonal and form a basis set (T is hermitian)
- Any input wave \mathbf{J} = superposition of normal modes: $\vec{\mathbf{J}} = \alpha_1 \vec{\mathbf{J}}_1 + \alpha_2 \vec{\mathbf{J}}_2$
- The response can be easily evaluated using:

$$\mathbf{T}\vec{\mathbf{J}} = \mathbf{T}(\alpha_1 \vec{\mathbf{J}}_1 + \alpha_2 \vec{\mathbf{J}}_2) = \alpha_1 \mathbf{T}\vec{\mathbf{J}}_1 + \alpha_2 \mathbf{T}\vec{\mathbf{J}}_2 = \alpha_1 \mu_1 \vec{\mathbf{J}}_1 + \alpha_2 \mu_2 \vec{\mathbf{J}}_2$$

- Problem: Find the Normal Modes

III-Polarisation of Light: Example of normal modes

- Reflection and refraction of monochromatic plane wave of arbitrary polarisation incident at dielectric boundary (n_1, n_2)

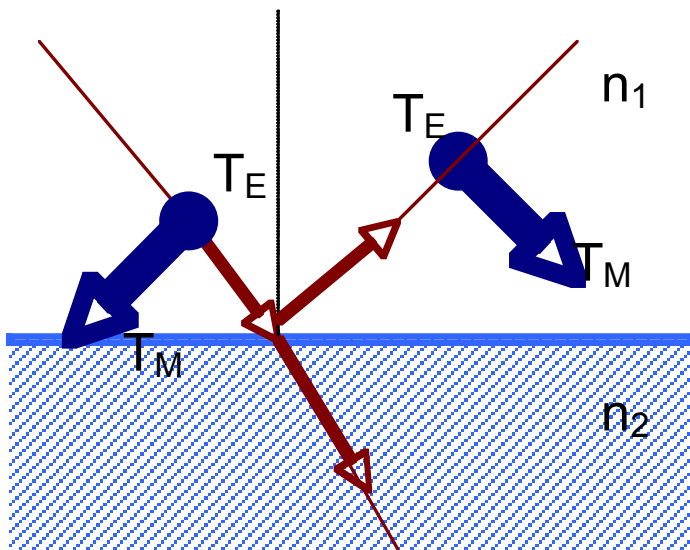

The normal modes (from Maxwell's) are the two linear polarisations:

T_E (transverse electric, parallel to the boundary): sigma or s polarisation

T_M (Transverse magnetic parallel to the plane of incidence): parallel or pi polarisation

IV-Crystal Optics

- Crystals are anisotropic media: electric displacement vector \vec{D} depends (possibly) on all the components of applied \vec{E} field.
- Each component of \vec{D} can be written as:


$$D_i = \sum_j \epsilon_{ij} E_j \text{ with } i, j = 1, 2, 3 \equiv x, y, z$$

$\tilde{\epsilon}$ is a second-rank tensor : the permittivity tensor

Electric displacement \vec{D} is the contraction of
a 2-tensor and a vector (tensor rank one): $\vec{D} = \tilde{\epsilon} \vec{E}$

IV-Crystal Optics

■ Examples of anisotropic media

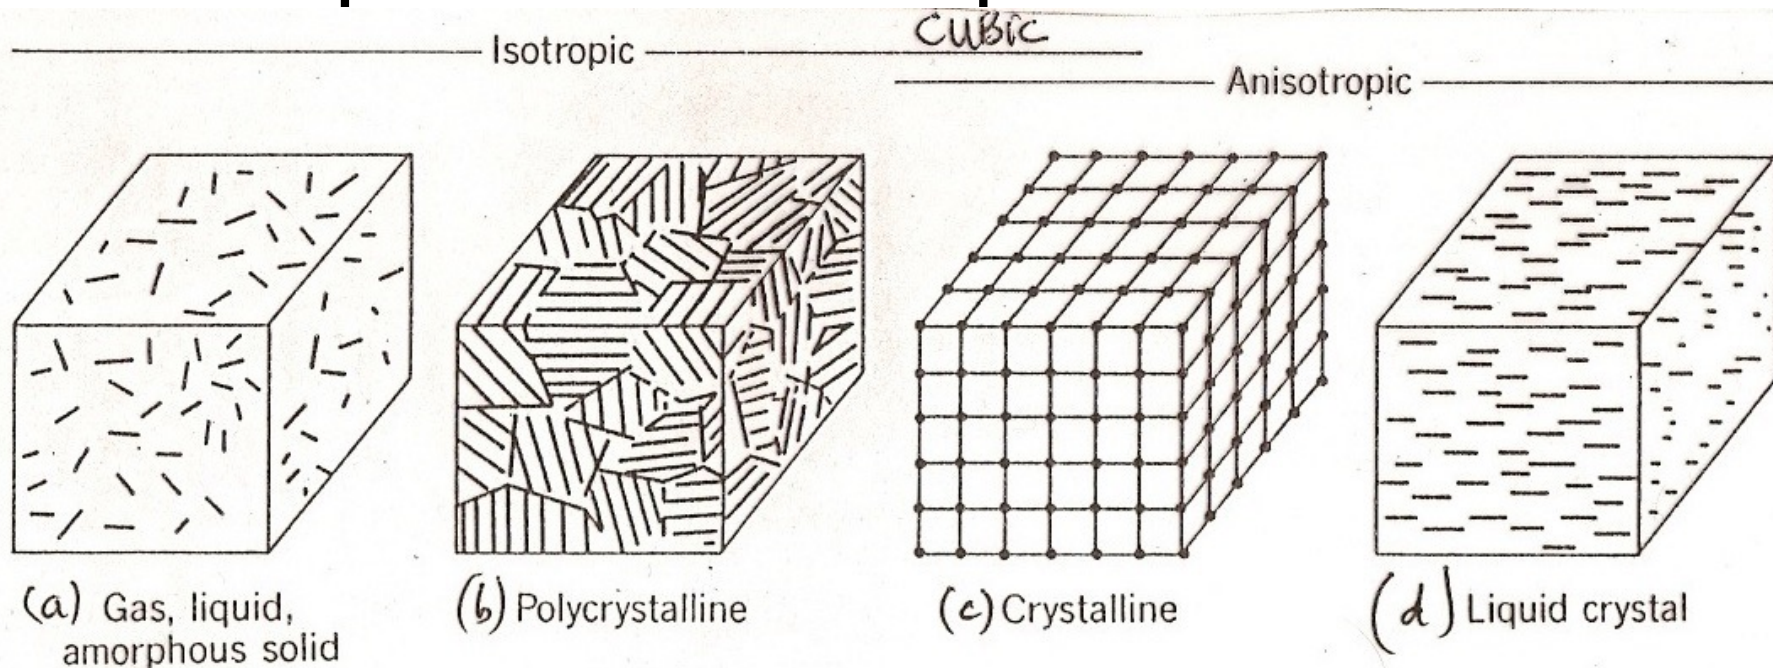

- (a) Completely isotropic: long and short-range disorder
- (b) Short-range order, long-range disorder: average macroscopic behaviour is isotropic
- (c) Positional and orientational orders: anisotropic (except fcc lattices)
- (d) Short-range disorder, long-range order: average macroscopic behaviour is anisotropic

IV-Crystal Optics

- There always exists a system of coordinates in which ϵ has only **diagonal elements**: ϵ_{11} , ϵ_{22} , ϵ_{33}
- This system defines the **Principal Axes**: directions of space for which \mathbf{E} and \mathbf{D} are parallel.
- The principal refractive indices are:

$$n_1 = \left(\frac{\epsilon_1}{\epsilon_0} \right)^{\frac{1}{2}} \quad n_2 = \left(\frac{\epsilon_2}{\epsilon_0} \right)^{\frac{1}{2}} \quad n_3 = \left(\frac{\epsilon_3}{\epsilon_0} \right)^{\frac{1}{2}}$$

IV-Crystal Optics

- Anisotropy leads to birefringence: phase velocity of an optical beam clearly depends on the direction of polarisation of its E vector.
- Three types of crystals:
 - Uniaxial: $n_1 = n_2 = n_o$ (ordinary index), $n_3 = n_e$ (extraordinary index) **calcite, quartz**
 - Biaxial: n_1, n_2, n_3 are all different.
 - Isotropic $n_1 = n_2 = n_3$

IV-Crystal Optics

- Geometrical construction that completely describes the optical properties: it specifies the values of the Principal refractive indices and the directions of the Principal axes.
- This is called the Index Ellipsoid. It is the surface of equation:

$$\frac{x^2}{n_1^2} + \frac{y^2}{n_2^2} + \frac{z^2}{n_3^2} = 1$$

x, y, z : principal axes


n_1, n_2, n_3 : principal indices

IV-Crystal Optics

- x, y, z are the Principal axes and n_1, n_2, n_3 are the principal refractive indices of the crystal.

- It is the surface of equation:

$$\frac{x^2}{n_1^2} + \frac{y^2}{n_2^2} + \frac{z^2}{n_3^2} = 1$$

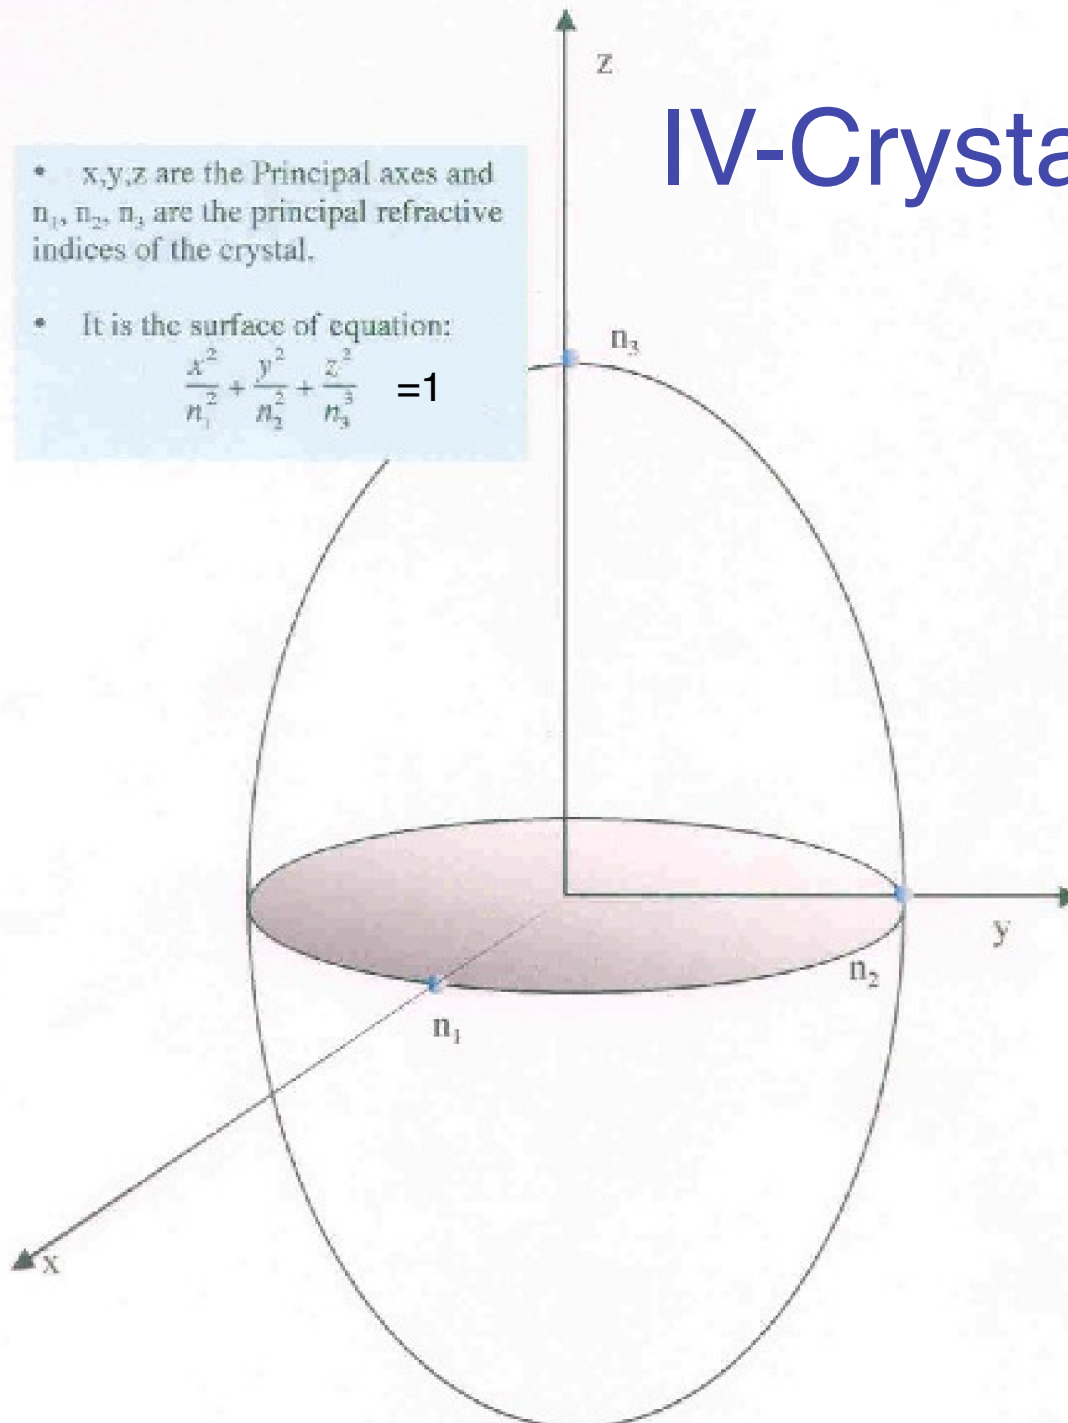


The Index Ellipsoid

1. Index ellipsoid is an ellipsoid of revolution for uniaxial crystals
2. Index ellipsoid is a sphere for cubic crystal
3. z is called optic axis for uniaxial crystals

IV-Crystal Optics

- Propagation of plane EM waves (linearly polarised) along one of Principal axes: what are the normal modes?

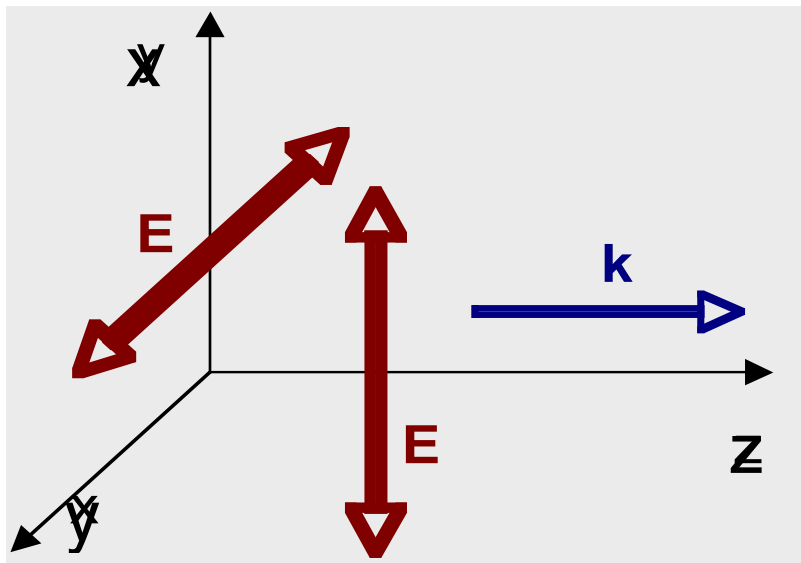


- Linear polarisation along x or y directions: Wave travels at phase velocity c_0/n_1 or (c_0/n_2) without change of polarisation.

- $D_1 = \epsilon_1 E_1$ ($D_2 = \epsilon_2 E_2$)

If k is along Oz, the Normal modes are the linearly polarised waves in the x and y directions respectively

IV-Crystal Optics


- If k is along Oz , but E is in x - y plane making angle θ with Ox
- Resulting polarisation?

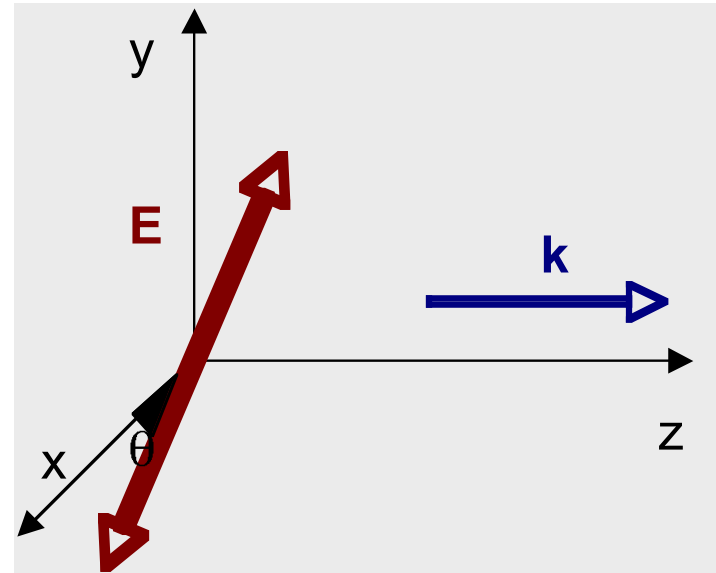

IV-Crystal Optics

- If k is along Oz , but E is in x - y plane making angle θ with Ox
- Traveling wave is a sum of the normal modes: each travels at (c_0/n_1) and (c_0/n_2) respectively
- The phase difference after a distance d travelled through the crystal:

$$\varphi = \frac{2\pi}{\lambda_0} (n_2 - n_1) d$$

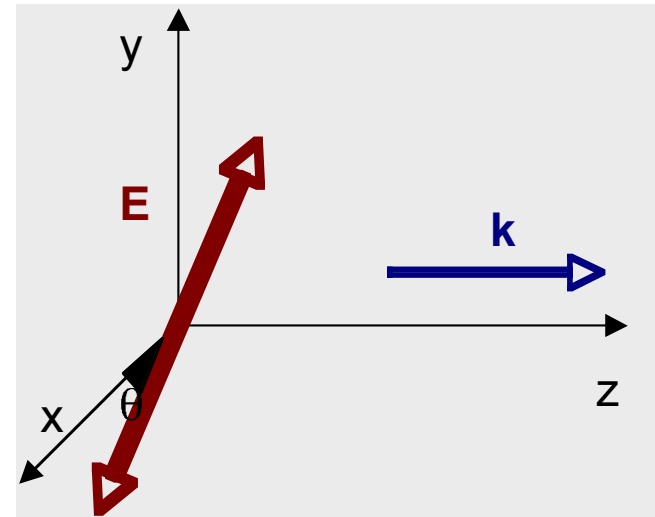


- The output wave is elliptically polarised.
- Crystal acts as a wave retarder
- Retardation plates are polarisation state converters

IV-Crystal Optics

- Propagation in any arbitrary direction (take the case of uniaxial crystals only): k makes angle θ with respect to Oz (optic axis)
- The normal modes are linearly polarised and orthogonal directions OA and OB (next slide).
- They form the semi-axes of the Index Ellipse and define the Ordinary (Direction OB) and Extraordinary (Dir. OA) waves respectively
- O (Ordinary) wave travels at c_0/n_o , E wave travels at $c_0/n_e(\theta)$ (uniaxial crystal).
- Simple geometry is used to calculate $n_e(\theta)$

IV-Crystal Optics

Index Ellipse (the normal modes are along \vec{OA} and \vec{OB})

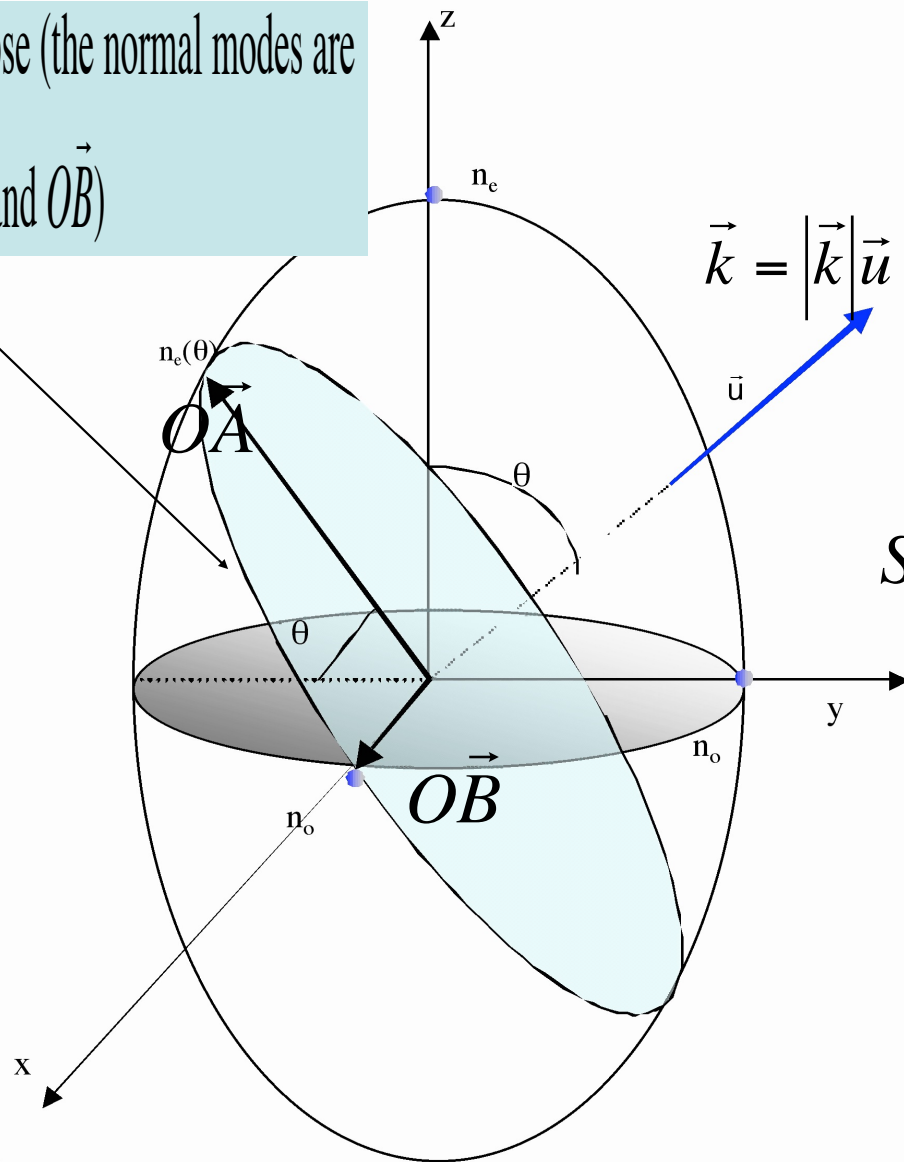

$$\sin(\theta) = z/(n_e(\theta))$$

$$\sin(90 - \theta) = \cos(\theta) = y/(n_o(\theta))$$

The Index Ellipse for uniaxial crystals

Equation of ellipse

$$\frac{y^2}{n_o^2} + \frac{z^2}{n_e^2} = 1$$

AP4/QElec

IV-Crystal Optics

- For $\theta = 0$ (k along z), $n_o = n_e(\theta)$ so that there is no birefringent behaviour (Hence the name **uniaxial**).
- A **Retardation plate** has its optic axis in the plane of the plate surface. The desired state of polarisation is obtained by adjusting the thickness (see p.64)


V POLARIZATION DEVICES: POLARIZERS

- Linear polarizer:
 - Transmits components of E field along the direction of its transmission axis
 - Blocks the orthogonal component
 - Can be achieved by:
 - Dichroic materials (selective absorption); Polaroid sheet
 - Selective reflection from isotropic media; Brewster's angle
 - Selective reflection/refraction in anisotropic


V POLARIZERS: POLARIZING BEAMSPLITTERS

- Ordinary and extraordinary waves refract at different angles in anisotropic crystal: polarized light can be obtained from unpolarized light.
- Typically two cemented prisms made of uniaxial materials with different orientations:
 - Wollaston prism
 - Rochon prism


V POLARIZERS: POLARIZING BEAMSPLITTERS

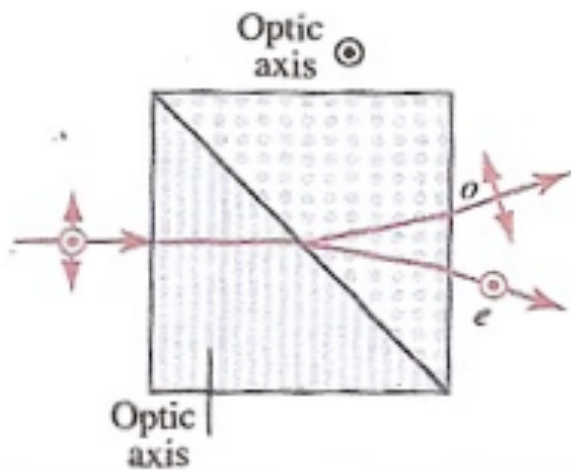

**Wollaston
prism**

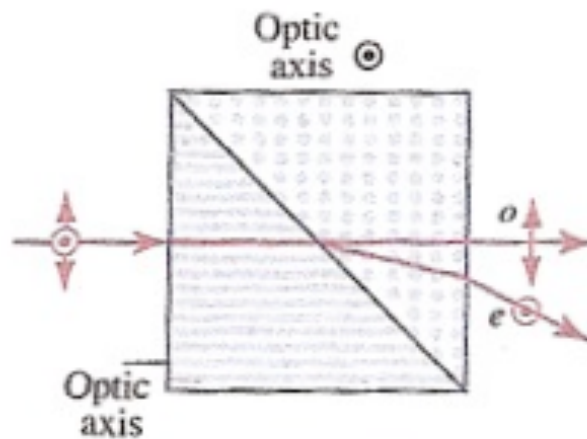

**Rochon
prism**

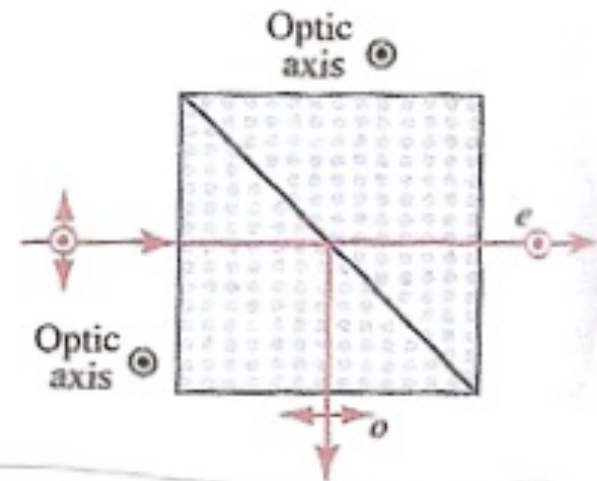

**Glan-Thompson
prism**

O-ray is totally internally reflected at cement interface


V POLARIZERS: Wave Retarders

- Convert one polarisation into another
- Normal modes are linearly polarised along the fast n_f and slow n_s axes.
- Constructed from anisotropic materials in the form of plates: light is made to travel along one of the principal axis
- Retardation is directly proportional to plate thickness: $\Gamma = \frac{2\pi}{\lambda}(n_f - n_s)d$ 71

V POLARIZERS: Wave Retarders

- Retardation is directly proportional to the thickness of the plate
- Retardation is inversely proportional to the wavelength
- Thin sheet of mica:
 - Indices: 1.599 and 1.594 at 633 nm (He-Ne laser) $\rightarrow \Gamma / d \approx 15.8 \text{ rad/mm}$
 - Sheet of 63.3 microns yields $\Gamma \approx \pi \text{ rad}$

V Wave Retarders: Light intensity control

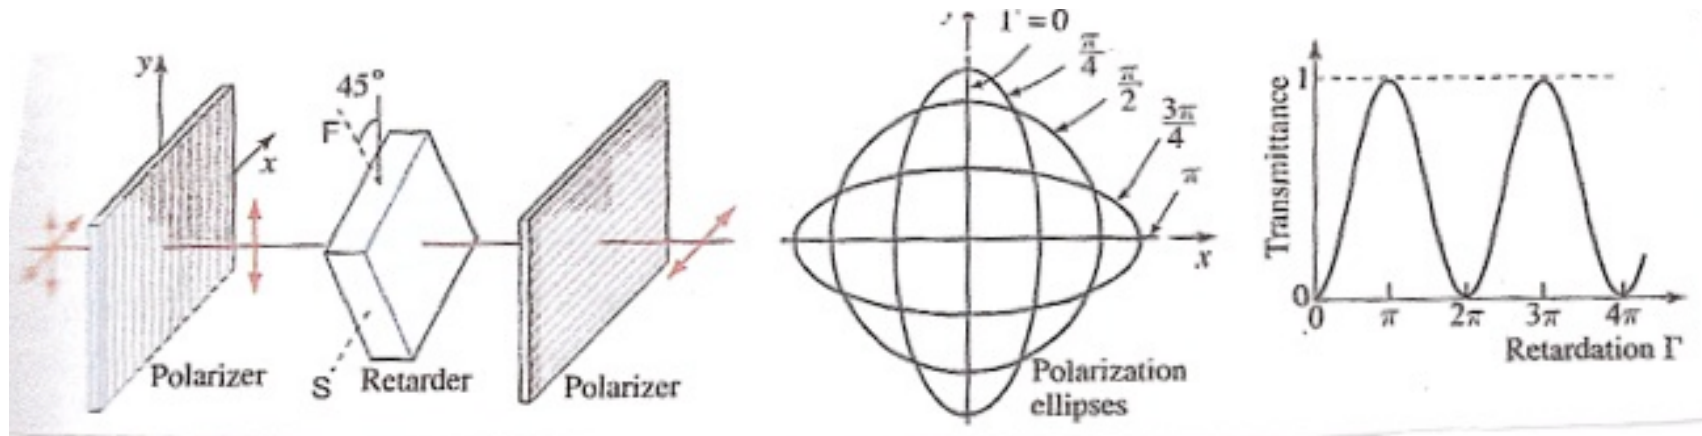

- Wave retarder placed between 2 cross-polarisers whose axes are at 45 deg. with respect to the axes of the retarder.
- Intensity transmittance of this device is:
$$I_T = \sin^2(\Gamma/2)$$
- Intensity can be changed by altering the retardation (see Electro-Optics) via use of electro-optic anisotropic crystals